
	ITEM NO.	PART NO.	DESCRIPTION	QTY
	1	H230	screw, 10-32 x 1/2" phil pan head, s/s	40
	2	H487	bracket, hinge	2
	3	E360	flanged male inlet recaptacle, 230V, 20A	2
	4	H296	guard, cooling fan, wire	2
	5	H343	screw, #10 x 5/8" hex head zinc	8
	6	H371	axle, 18.03" x .50" dia	1
	7	H254	washer, axle, cut 1/2" id	4
	8	H392	wheel, 10"	2
	9	H042	c-clip, 12mm, external	2
	10	B130 B135	45 deg, street elbow, brass, 1/4" male NPTF	2
	12	C313C	tee, 1/4" mpt x 1/4" mpt x 1/4" mpt regulator, 450 psi, silver spring	1
	13	B103	elbow, brass, 90 deg, 1/4"mpt x 1/4" fpt	6
	14	B103	nipple, brass, 1/4"m, hex	4
	15	AH103	hose, pulse, 3/8" x 14.5", 1/4 FSW x 1/4 FPT	1
	16	H668	caster, 4", black hub & gray tread	2
	17	H342	bolt, 1/4-20 x 1" hex head, s/s	8
_	18	H210	washer, 1/4" flat, s/s	8
	19	H216	nut, lock, 1/4-20, nylon insert, s/s	8
	20	H273	nut, kep, #10-32 zinc	16
	21	H484	plate, mounting, QD	2
	22	B127	<del>_</del>	1
		1	plug, brass, 1/4"mpt, hex flat washer, 9/16"ID x 1 1/16"OD, AN960-C916	-
	23	H212 B113	tee, 1/4" fpt x 1/4" fpt x 1/4" fpt	5
	25	B656		1
	26	B109	valve, ball, 1/4" fpt x 1/4" fpt, s/s barb, 1/4" barb x 1/4" mpt	3
	27	PH615	·	1
	28	B110	sol hose, 1/2" kuri 100psi	2
	29		adapter, brass, 1/4" sw barb x 1/4" fpt, w/gasket	
		AH184	hose, 3/8" x 10", (OAL), f x fsw, surge, 1600psi	1
	30	B102 H308D	qd, brass, 1/4" f x 1/4" fpt	1
	31		gauge, pressure, 2000 PSI	1
	32 33	B311 H486	adapter, swivel, 1/8" mpt x 1/8" fsw	2
			latch, front, set, large	-
	34 35	H289 E515	washer, 10 flat, s/s	2
	36	H422	switch, rocker, 2 position plug, dome 3/8", black	2
	37	H434	plug, vent, heyco, 1/2"	1
	38	G068	<u> </u>	2
	39		bumper, 7/8" x 1/4" head	1
		H641-DIY	plate, switch	<u> </u>
	40 41	P696	base, breeze	1
		C343	pump, 800psi	
	42	B260A	quick disconnect, 1/4" mqd x mpt, open-spray	3
	43	B259A	qd, brass, 1/4" fqd x fpt	_
	44 45	B246 B186	plug, brass, 3/8" mpt, hex	3
	45 46	B186 B259	elbow, 90 deg street, 3/8"mpt x 3/8" fmpt	1
			qd, brass, 1/4" fqd x mpt	
	47 48	B108 B207	valve, brass, 1/4" check	1
			elbow, brass, 90 deg, 1/4" fpt x 1/4" fpt	1
	49	A901	heater, 1000wt, 115v	1
	50 51	PH628-10 C347	vac hose, 2", black, wire reinforced	1
	51 52	H503	vac motor, lx, hybrid, 173 cfm, 120v vac support, 3 stage, 3.25", no thrds	6
	53	C348	vac support, 3 stage, 3.23 , no mias vac motor, lx, hybrid, w/inlet tube, 173 cfm, 120v	1
				1
	54	PH628-10	vac hose, 2", black, wire reinforced	1
	55 54	B119A	filter, strainer, 1/2" fpt	1
	56	B210	bushing, brass, 1/2"mpt x 3/8" fpt, hex	1
	57	H299	washer, 11/16"id x 1-1/2"od x .075, s/s	2
	58	B160	adapter, brass, 1/2" barb x 3/8" fsw, ball end	1
	59	PH615	sol hose, 1/2" kuri 100psi	1
	60	B216	nipple, brass, 3/8" x close sol hose, 1/2" kuri 100psi	1
_	61	PH615		1

ITEM NO.	PART NO.	DESCRIPTION	QTY.
63	H390A	bracket, "L", 2" x 2"	2
64	P697	sol tank, breeze	1
65	G062	lid, sol tank	1
66	H215	nut, hex, 1/4-20 s/s	1
67	H211	washer, 1/4"id x 1"od, flat, s/s	4
68	G052	washer, buna 1-1/8" od x 3/16" id	4
69	H203	bolt, 1/4-20 x 1-1/4"	1
70	H225	valve, drain, 1-1/2"	1
71	H485	handle, aluminum grip, black	1
72	H135	Cuff-Lynx, 2" m cuff x 2" mpt	1
73	A926	elbow, inlet assembly 2"	1
74	G091	gasket, 7", vac lid	1
75	G090	lid, vac tank, clear, 7"	1
76	H304	screw, #8 x 5/8 phil oval, s/s	6
77	G003	filter, foam, 2", vac stack, 1/2"	1
78	G097	filter, screen mesh, 1.90" dia	1
79	P502	adapter, 1.5" pvc, fslip x fslip	1
80	PH633-13	pipe, pvc, 1-1/2"	1
81	P520	adapter, 1.5" mpt pvc	1
82	G002	gasket, cam fitting polyethylene, 2.35" OD 1.90" ID	1
83	H300	cuff, hose, 1-1/2 x 1-1/2, wire	1
84	P698	vac tank, breeze	1

	REVISIONS					
REV.	DESCRIPTION	DATE	APPROVED			
OD	ORIGINAL DRAFT		JFL			

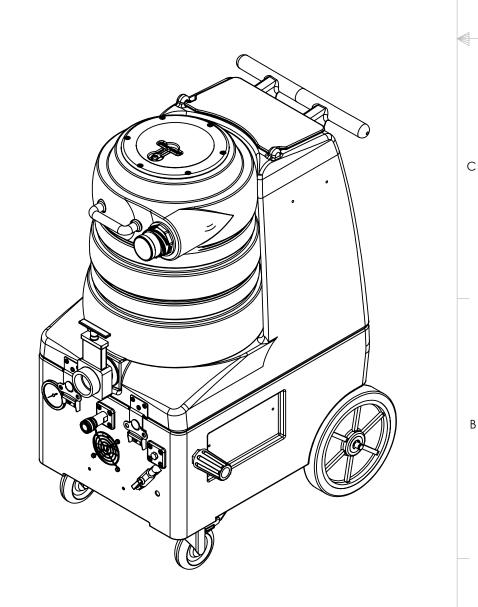

		NAME	DATE	K X	VTE.	E PRODUC	)TC	INIC
	DRAWN	M.LaBarbera	5/2019	TAT		858-679-1191	<i>γ</i> ιο,	IINC.
	CHECKED			TITLE:				
		COMMENTS:  PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS		Breeze				
	DRAWING IS THE SOLE PROPERTY OF MYTEE PRODUCTS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MYTEE PRODUCTS, INC. IS PROHIBITED.		SIZE		Z-103L	X	<b>OD</b>	
		SCAI	LE: 1:24	DO NOT SCALE DRAWING	SHEE	T 1 OF 3		
		2			·	1		

6 5 4 3

